

U.S.A.和加拿大标准聚氯乙烯绝缘软线

U.S.A AND CAS STANDARD PVC INSULATED FLEXIBLE CORD


SPT-1 SPT-2 SPT-3 SPT-1W SPT-2W SPT-2-R

PVC绝缘平行软线

PVC Insulated Paraller Flexible

Cords Rating:300V 60°C~105°C

Standard:UL62CSA-C22.2

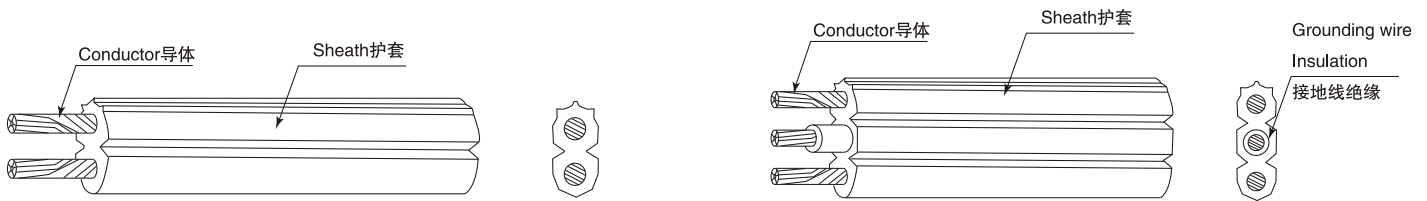

Type 型号	Specification 规格		Conductor Construction 导体结构 No./(mm)	Insulation thickness 绝缘厚度 (mm)	Overall diameter 完成外径 (mm)	Max Conductor resistance at 20°C 20°C时导体电阻最大值 Ω/ km	
	No.of core 线规	AWG 线规				Bare	Tinned
SPT-1	2	18	41/0.160	0.76	2.8±0.1 x 5.6±0.2	22.4	23.6
	3	18	41/0.160	0.76	2.8±0.1 x 8.0±0.2	22.4	23.6
SPT-2	2	18	41/0.160	1.14	3.5±0.1 x 7.0±0.2	22.4	23.6
		16	65/0.160	1.14	3.8±0.1 x 7.4±0.2	14.1	14.9
	3 ⁽¹⁾	18	41/0.160	1.14	3.5±0.1 x 9.0±0.2	22.4	23.6
		16	65/0.160	1.14	3.8±0.1 x 10.0±0.2	14.1	14.9
	3 ⁽²⁾	18	41/0.160	1.14	3.5±0.1 x 10.1±0.2	22.4	23.6
		16	65/0.160	1.14	3.8±0.1 x 11.0±0.2	14.1	14.9
SPT-3	2	18	41/0.160	1.52	4.4±0.1 x 8.7±0.2	22.4	23.6
		16	65/0.160	1.52	4.7±0.1 x 9.5±0.2	14.1	14.9
		14	41/0.254	2.03	6.0±0.2 x 12.0±0.3	8.88	9.34
		12	65/0.254	2.41	7.5±0.2 x 14.0±0.3	5.58	5.88
	3	18	41/0.160	1.52	4.4±0.1 x 10.8±0.2	22.4	23.6
		16	65/0.160	1.52	4.7±0.1 x 12.0±0.3	14.1	14.9
		14	41/0.254	2.03	6.0±0.2 x 14.5±0.3	8.88	9.34
		12	65/0.254	2.41	7.5±0.2 x 16.0±0.3	5.58	5.88